Flexible Liquid Tight Conduit, 2-1/2" - Special Order

Part no. 9437 UPC 658746943701

Family image shown; colour and finish may differ.

UL Listed | E129973 | CSA Certified | Liquid-tight | Type B (LFNC-B)

2-1/2-inch flexible non-metallic liquid-tight conduit (Type B, LFNC-B) - a PVC raceway that keeps oil, water and sunlight off the conductors inside. Terminate it with Sealproof liquid-tight connectors.

AVAILABILITY	Special order - made to order; ask us for lead time and minimum run
TRADE SIZE	2-1/2"
LENGTH	100 ft per coil
COLOUR	Gray
MATERIAL	Flexible PVC
LISTING	UL Listed, file E129973; CSA Certified | Type B (LFNC-B)
TEMPERATURE RATING	105°C dry / 60°C wet / 70°C oil resistant (90°C wet available on request)

Specifications

Part number	9437
UPC / GTIN-12	658746943701
I.D. / trade size	2-1/2"
Colour / finish	Gray
Listing	UL Listed, file E129973; CSA Certified
Material	Flexible PVC
O.D.	2.840 - 2.875 in
I.D.	2.480 - 2.555 in
Temperature rating	105°C dry / 60°C wet / 70°C oil resistant (90°C wet available on request)
Standard put-up	100 ft per coil
Country of origin	USA - Elizabeth, New Jersey

DIMENSIONAL DRAWING

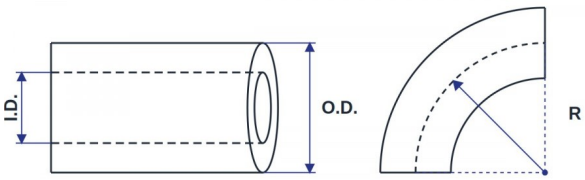

O.D. outside diameter | I.D. inside diameter. Nominal, in inches (LFNC-B 105°C series spec sheet).

DOCUMENTS
Part page: https://superflex.com/product/flexible-liquid-tight-conduit-2-1-2-special-order/
Sealproof catalog, Rev. 2026 (PDF): https://superflex.com/wp-content/uploads/2026/09/Sealproof-Weatherproof-Catalog-Rev-2026.pd
UL file E129973: https://iq.ulprospector.com/en/search?term=E129973

Generated November 16, 2026 from the live product record. Specifications subject to change without notice; confirm listings with the certifying body before submittal.