

# Flexible Liquid Tight Conduit, 4" - Special Order

**Part no. 9440**    UPC 658746944005



Family image shown; colour and finish may differ.

**UL Listed | E129973 | CSA Certified**

**Liquid-tight | Type B (LFNC-B)**


4-inch flexible non-metallic liquid-tight conduit (Type B, LFNC-B) - a PVC raceway that keeps oil, water and sunlight off the conductors inside. Terminate it with Sealproof liquid-tight connectors.

|                           |                                                                           |
|---------------------------|---------------------------------------------------------------------------|
| <b>AVAILABILITY</b>       | Special order - made to order; ask us for lead time and minimum run       |
| <b>TRADE SIZE</b>         | 4"                                                                        |
| <b>COLOUR</b>             | Gray                                                                      |
| <b>MATERIAL</b>           | Flexible PVC                                                              |
| <b>LISTING</b>            | UL Listed, file E129973; CSA Certified   Type B (LFNC-B)                  |
| <b>TEMPERATURE RATING</b> | 105°C dry / 60°C wet / 70°C oil resistant (90°C wet available on request) |

## Specifications

|                           |                                                                           |
|---------------------------|---------------------------------------------------------------------------|
| <b>Part number</b>        | 9440                                                                      |
| <b>UPC / GTIN-12</b>      | 658746944005                                                              |
| <b>I.D. / trade size</b>  | 4"                                                                        |
| <b>Colour / finish</b>    | Gray                                                                      |
| <b>Listing</b>            | UL Listed, file E129973; CSA Certified                                    |
| <b>Material</b>           | Flexible PVC                                                              |
| <b>O.D.</b>               | 4.460 - 4.500 in                                                          |
| <b>I.D.</b>               | 4.000 - 4.090 in                                                          |
| <b>Temperature rating</b> | 105°C dry / 60°C wet / 70°C oil resistant (90°C wet available on request) |
| <b>Country of origin</b>  | USA - Elizabeth, New Jersey                                               |

## DIMENSIONAL DRAWING

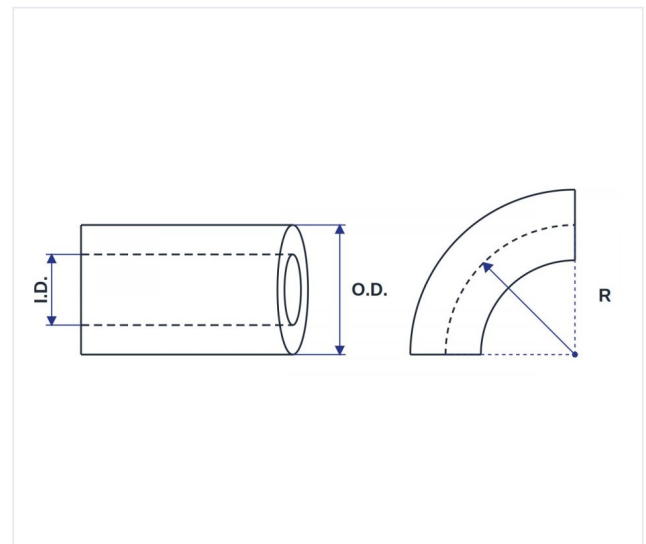

O.D. outside diameter | I.D. inside diameter. Nominal, in inches (LFNC-B 105°C series spec sheet).

## DOCUMENTS

Part page: <https://superflex.com/product/flexible-liquid-tight-conduit-4-special-order/>

Sealproof catalog, Rev. 2026 (PDF): <https://superflex.com/wp-content/uploads/2026/09/Sealproof-Weatherproof-Catalog-Rev-2026.pdf>

UL file E129973: <https://iq.ulprospector.com/en/search?term=E129973>