# Screw-On Connector, Straight, 1/2" - Bulk, 500 pcs/box

**Part no. 8503P** UPC 658746885049

Family image shown; colour and finish may differ.

**Liquid-tight | for LFNC-B conduit**

A screw-on non-metallic liquid-tight connector - terminates Type B liquid-tight flexible conduit (LFNC-B) into a box or enclosure.

| | |
|---|---|
| TYPE | Screw-on connector |
| FOR | Non-metallic liquid-tight flexible conduit, Type B |
| MATERIAL | PVC - one-piece, UV-rated |
| PACK | 500 per carton |

## Specifications

| | |
|---|---|
| Part number | 8503P |
| UPC / GTIN-12 | 658746885049 |
| Material | PVC |
| A - overall length | 1.750 in |
| B - thread length | 0.500 in |
| C - body diameter | 1.250 in |
| Carton quantity | 500 |
| Catalog | Sealproof catalog, p. 34 |
| Country of origin | USA - Elizabeth, New Jersey |

DIMENSIONAL DRAWING

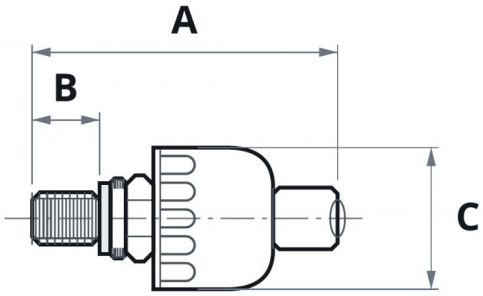


A overall length (height on the 90° sweep) | B thread length | C body diameter (reach on the 90° sweep). Nominal, in inches.

## Features

- Listed under the Underwriter's Laboratories
- Available 3/8 inch through 2 inch
- All nylon construction resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents
- No disassembly required. Instead, the installer simply pushes the conduit or tubing onto the ferrule, tightening the domed sealing nut. The completed assembly can then be secured in the chassis by the locknut

**DOCUMENTS** Part page: https://superflex.com/product/screw-on-connector-straight-1-2-bulk-500-pcs-box-8503p/
Sealproof Weatherproof catalog, Rev. 2026, p. 34: https://superflex.com/wp-content/uploads/2026/11/Sealproof-Weatherproof-Catalog


Generated November 12, 2026 from the live product record. Specifications subject to change without notice; confirm listings with the certifying body before submittal.