
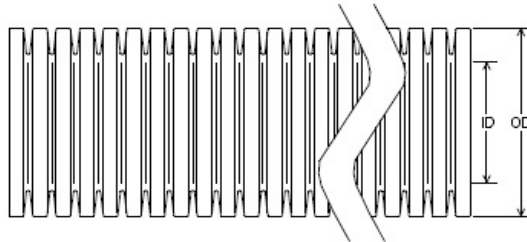



Metric designator (trade size)	Outside diameter (OD)				Inside diameter (ID)			
	Minimum		Maximum		Minimum		Maximum	
	mm	(in)	mm	(in)	mm	(in)	mm	(in)
16 (1/2)	21.13	(0.832)	21.54	(0.848)	14.58	(0.574)	16.00	(0.630)
21 (3/4)	26.42	(1.040)	26.92	(1.060)	19.66	(0.774)	21.18	(0.834)
27 (1)	33.15	(1.305)	33.66	(1.325)	25.37	(0.999)	26.90	(1.059)
35 (1-1/4)	41.86	(1.648)	42.47	(1.672)	33.73	(1.328)	35.36	(1.392)
41 (1-1/2)	47.96	(1.888)	48.56	(1.912)	39.57	(1.558)	41.20	(1.622)
53 (2)	60.02	(2.363)	60.63	(2.387)	51.18	(2.015)	52.81	(2.079)



-  US LISTED file # E530821
- FT4 Rated
- 1/2 inch through 2 inch trade size
- Compatible with any UL approved ENT fittings
- Color: Gray
- Durable, nonconducting rigid PVC construction. Phthalate Free.
- Available in coils, reels and 10 ft sticks
- Suitable for encasement in concrete or in walls and ceiling (per NEC code)

MATERIAL:	PVC
CERTIFICATIONS:	UL1653
MARKING:	UL 1660
FILE #	E530821

  
**Superflex Ltd.**  
SINCE 1981

PROPERTY OF SUPERFLEX LTD

SUPERFLEX LTD ELIZABETH, NJ

DESCRIPTION:
SPECIFICATION SHEET FOR
SEALPROOF
Electrical Nonmetallic Tubing
1/2" - 2" size

<b>PART NO</b>
<b>REV: 1</b>

REV DATE
6/1/2024