


SEALPROOF®

NON-METALLIC LIQUID TIGHT CONDUIT



- Listed under the Underwriter's Laboratories File No. E129973
- CSA Certified by Canadian Standards Association File No. LL-84705
- 3/8 inch through 2 inch trade size
- Use with SEALPROOF® straight or right angle connectors
- May also be used with metallic connectors for liquid-tight conduit
- Resists corrosion, abrasion, oil, water, acid, metal shavings, and rough environments
- Resists abuse, pull and crushing
- UL Rating: 80°C dry, 60°C wet. 70°C oil resistant
- Outdoor, sunlight resistant, direct burial
- CSA rating – 18°C to 75°C
- Smooth inside for easier wire pulling, no hazardous sharp edges or burrs, will not damage conductors
- Light weight and lower installed cost
- Quick installation, cuts with utility knife or PVC cutter
- Integral rigid & flexible PVC construction. Phthalate Free.

Item #	Description	Trade Size	Standard Package	Weight	O.D. Min-Max	I.D. Min-Max
8430	Flexible Liquid Tight Conduit	3/8 "	100	13 lbs	.690 - .710 "	.484 - .504 "
8431	Flexible Liquid Tight Conduit	1/2 "	100	15 lbs	.820 - .840 "	.622 - .642 "
8432	Flexible Liquid Tight Conduit	3/4 "	100	20 lbs	1.030 - 1.050 "	.820 - .840 "
8433	Flexible Liquid Tight Conduit	1 "	100	27 lbs	1.290 - 1.315 "	1.041 - 1.066 "
8434	Flexible Liquid Tight Conduit	1 1/4 "	100	35 lbs	1.630 - 1.660 "	1.380 - 1.410 "
8435	Flexible Liquid Tight Conduit	1 1/2 "	50	23 lbs	1.865 - 1.900 "	1.575 - 1.600 "
8436	Flexible Liquid Tight Conduit	2 "	50	33 lbs	2.340 - 2.375 "	2.020 - 2.045 "

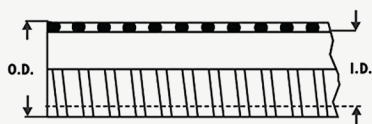

Superflex Ltd.

400 S Second St, Elizabeth, NJ 07206, USA

