Screw-On Connector, Straight, 1/2" - Bulk, 500 pcs/box

Part no. 8503P UPC 658746885049



Family image shown; colour and finish may differ.

Liquid-tight | for LFNC-B conduit


A screw-on non-metallic liquid-tight connector - terminates Type B liquid-tight flexible conduit (LFNC-B) into a box or enclosure.

TYPE	Screw-on connector
FOR	Non-metallic liquid-tight flexible conduit, Type B
MATERIAL	PVC - one-piece, UV-rated
PACK	500 per carton

Specifications

Part number	8503P
UPC / GTIN-12	658746885049
Material	PVC
A - overall length	1.750 in
B - thread length	0.500 in
C - body diameter	1.250 in
Carton quantity	500
Catalog	Sealproof catalog, p. 34
Country of origin	USA - Elizabeth, New Jersey

DIMENSIONAL DRAWING

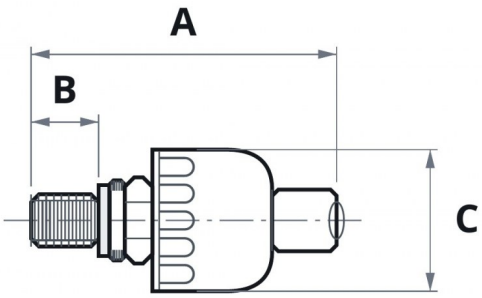

A overall length (height on the 90° sweep) | B thread length | C body diameter (reach on the 90° sweep). Nominal, in inches.

Features

- Listed under the Underwriter's Laboratories
- Available 3/8 inch through 2 inch
- All nylon construction resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents
- No disassembly required. Instead, the installer simply pushes the conduit or tubing onto the ferrule, tightening the domed sealing nut. The completed assembly can then be secured in the chassis by the locknut

DOCUMENTS Part page: https://superflex.com/product/screw-on-connector-straight-1-2-bulk-500-pcs-box-8503p/
Sealproof Weatherproof catalog, Rev. 2026, p. 34: https://superflex.com/wp-content/uploads/2026/11/Sealproof-Weatherproof-Catalog

Generated November 8, 2026 from the live product record. Specifications subject to change without notice; confirm listings with the certifying body before submittal.